

# ACE HYDRAULIC & PNEUMATICS/ACADEMY TOOL & SUPPLY

January 31, 2019



**Distributors of INDUSTRIAL TOOLS & SUPPLIES**



some quantities limited

**6720 VIP Parkway • Syracuse, New York 13211**  
**Phone 315-454-8989 24 Hour Fax 315-455-9522**

**JohnDow Industries Model JDI-17PLP Poly Low Profile Oil Drain**

High-impact roto-molded polyethylene construction. Reinforced ribbing provides added support. Long-reach T-Handle makes drain easy to position under the vehicle. T- Handle folds for compact storage. Drain valve is recessed for optimal protection



**Both For \$595**

**Model JDI-17PK Pump Kit for JDI-17PLP**

110v Electric Pump, 8' Evacuation Hose. All Necessary Fittings to Assemble to DOWJDI-17PLP Allows for easier evacuation of fluid. Complete pump kit



**MAYHEW TOOLS Model 61050 24 Pc. Punch & Chisel Set**

Prick Punch 5/16" - 4 1/2" Long Center Punch 3/8" - 5" Long 1/2 - 6" Long Cape Chisel 3/8" - 5 1/2" Long 1/2 Rnd Nose Chsl 3/8" - 5 1/2" Long Diamond Pt. Chisel 3/8 - 5 3/4" Long Pin Punch 3/32" - 4 1/2" Long, 1/8" - 4 3/4" Long, 5/32" - 5" Long, 3/16" - 5 1/4" Long, 1/4" - 5 3/4" Long, 5/16" - 6" Long Solid Punch 1/4" - 5" Long 3/16" - 5" Long 5/32" - 5" Long 1/8" - 5" Long 3/32" - 5" Long 5/16" - 6" Long Cold Chisel 1/4" - 5" Long 5/16" - 5" Long 3/8" - 5 1/2" Long 1/2" - 6" Long 5/8" - 6 1/2" Long 3/4" - 7" Long. List \$203.55



**SALE \$139**

**MAYHEW TOOLS Model 32020 Pneumatic Pilot Punch Kit**

High grade S2 steel heat treated for maximum durability, for use in removing roll, spring and split pins. List \$93.04 Includes: 1/4 X 6, 5/16 X 6, 3/8 X 6, 7/16 X 6, 1/2 X 6




**SALE \$59**

**ASSOCIATED Battery Chargers**

Model	6001A	6002B	6006	6009	6010B
UL Continuous Rating	100/75A	100/80/50/40A	70/65/30A	70/60A	
Battery Volts	6/12	6/12/18/24	6/12/24	6/12	6/12 Volts
Manufacturer Boost Rating	625A	725A 600A	540A		70/60a
UL Cranking Assit Rating	375A	400A 280A	265A		
AC Cord	10' 14-3	10' 14-3	6.5' 16-3	6.5' 16-3	
DC Leads	8' 4AWG	8' 4AWG	7' 4 AWG	7' 4 AWG	
Clamp Rating	500A	500A 500A	500A		
Transformer/Rectifier					
Limited Warranty	5 Years	5 Years	5 Years	5 Years	5 Years
Shipping Dimensions (HxWxD)	26" x 16" x 14"	26" x 16" x 14"	23" x 19" x 16"	23" x 19" x 16"	17" x 16" x 30"
Weight	58 lbs	70 lbs 53 lbs	48 lbs		35.3 pounds

**SALE \$629 \$735 \$475 \$438 \$425**



**Chicago Pneumatic Model CP7763 3/4-In. Super Duty Air Impact Wrench**


1200 Ft. Lbs. of Torque  
 Power to loosen the toughest fastener. Weighs less than 12 lbs. 6 vane motor for speed - power with any 1/2-Inch hose air supply. Twin Hammer high performance clutch. Ergonomic handle exhaust keeps exhaust air away from the operator



**SALE \$465**

**MAYHEW TOOLS Model 31940 5 Piece Pneumatic Separating Fork Set**

Sizes: 11/16"/17mm; 15/16"/23mm; 1-11/16"x7"L; 1-3/8"/35mm; and 1-1/8"/29mm. Packed in a box. Lifetime warranty. List \$202.55



**SALE \$139**

**Blackhawk Automotive Model B65114 4 Ton Porto Power**

List 291.00



**SALE \$198**

**Model B65115 10 Ton Porto-Power**

List 467.00

4-ton Porto-Power set and 10-ton Porto-Power Body Repair Kit has snap-lock extension tubes. Automatic pump overload system helps prevent damage to rams and equipment. Flex head features permanently molded rubber pad, interlocked to prevent separation. 1/2-ton capacity spreader has 2in. jaws and spreads from 5/8in. to 3 3/4in. Includes plastic tool case.

Model	Ram Capacity	Pump Capacity	Ram Close Hgt	Ram Ext Hgt	Ram Eff Area	GW
B65114	4 ton	8,000 psi	11"	15-3/4"	1.0 in <sup>2</sup>	46 lbs
B65115	10 ton	10,000 psi	13 5/8"	19-3/4"	2.4 in <sup>2</sup>	88 lbs

**SALE \$349**

**AIRCAT PNEUMATIC TOOLS Long Reach Ratchets**

**Model 808-15**  
 3/8" 15" long for hard to reach applications. 30 ft-lbs of torque. High grade materials and support bearings for reliability. Very fast 200 RPM. 2 year warranty




**SALE \$129**

**Model 808-22**  
 22" long for hard to reach areas. 65 ft-lbs of torque. High grade materials and support bearings for reliability. Very fast 160 RPM 2 year warranty

**SALE \$149**

**Astro Pneumatic Model PR-36 Air Riveter**


3/16" Capacity



**SALE \$119**

**Astro Pneumatic Model PR-14 Air Riveter**

3/32", 1/8", 5/32", 3/16" and 1/4" Capacity



**SALE \$149**

**Chicago Pneumatic Model CPT7120 Needle Scalers**

BPM 4600 List \$318



**SALE \$189**

**Central 100 years TOOLS, INC. Torque Wrenches**

**Model 97353 1/2 Inch Drive 25-250 ft lbs**

Set desired torque on micrometer-type scale by rotating hand grip. Wrench automatically indicates desired torque by feel and sound. Feel and hear a signal when the correct torque is reached. Ideal for jobs where it is difficult to read a dial. Torques left or right and resets in seconds. Accurate throughout entire torque range.



**SALE \$159**

**Model 97355 3/4 Inch Drive 100-600 ft lbs**

Ratchets in only one direction to eliminate wear. Rubberized head for greater production. Selected reading is automatically locked in. Indicates desired torque by feel and sound. Accuracy +4 percent right hand and +6 percent left hand direction from 20-100 percent of capacity. Rugged non-slip metal handles.

**SALE \$495**

**FREE! 4 Piece Socket Set with Purchase Model 97355 (\$120 Value)**

**We Carry a Large Selection of Torque Wrenches & Torque Multipliers**

At Associated Equipment Corp., we utilize more than 60 years of experience to create quality, American-made battery chargers, testers, analyzers and more, and our experience and expertise has enabled us to be a leader in the industry.

**WE STOCK A LARGE VARIETY OF ENERPAC & POWERTEAM ACCESSORIES**



**Model HW93735A**

**25 Ton Truck Jack**

Compact, powerful design quickly lifts to rated capacity  
Low height allows lifting from axle or suspension  
Rapid two-speed air hydraulic action quickly advances ram to load. Pressure relief valve prevents overloading  
Specially coated ram prevents rust and extends jack life  
Minimum height is 8 1/4in.; Max. height is 18in.; 4 7/8in. extension screw. Includes 3in. extension adapter for additional pick up height. List \$3037.00



**SALE \$1995**




**Model 82320**

**Wheel Dolly 1500 lb capacity**

4 3/4" Lift Travel  
Lift Arms are 24 1/2" long with a 26" spread.  
For the removal and installation of single, tandem and duplex tires and wheels.  
Dolly handles any tire diameter and up to 1500 lbs. combined tire and wheel weight.  
Three 4" diameter swivel ball bearing caster wheels provide easy maneuverability and positioning  
List \$1167.00.

**SALE \$750**

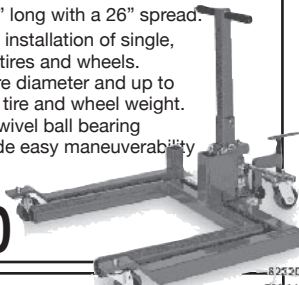

**Model 72200**

**22 Ton Capacity Floor Jack**

**SALE \$695**

Long "T" handle. Jack load release top mounted at "T" handle and allows operation at any handle position. Handle locking lever. Compact. Rust inhibitive coating on ram and extension screw. Large diameter wheels. Self-retracting ram.  
Safety by-pass system prevents cylinder damage. Safety overload system. Integrated filter protects air motor. Specially designed ram and dust seals. Fast lifting air motor. Four removable saddles. List \$1159.00




**Model 72500E**

**1/2 Ton Telescopic Transmission Jack**

Load Capacity 1 pounds  
Height 37.0 inches  
Length 34.0 inches  
Max Lifting Height 1.0 inches  
1/2 Ton Capacity  
Rust inhibitive coating on rams. Foot operated pump and lowering pedals.  
1/2 Ton Telescopic Transmission Jack is designed for the removal, installation and transportation (in the lowered position) of transmissions and transfer cases on passenger cars, vans and light trucks that are raised by an in-ground or above-ground lift. List \$1516.00

**SALE \$985**

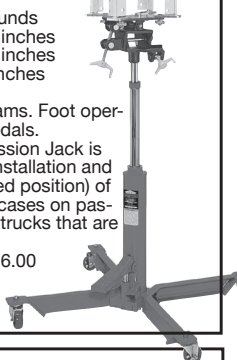

**MODEL 72000EI**

**1 1/2 Ton Transmission Jack**

Wide chassis with open front  
Low Lift Height 7.75"  
High Lift Height 36.5"  
Length 45"  
Width 28"  
Saddle Size 10.25" x 15.25"  
Shipping Weight 310 lbs.  
List \$1830.00

**SALE \$1248**



**Model G402**

**Rotary Barrel Pump**

Cast iron pump for transferring petroleum-based, non-corrosive fluids. Comes with standard bung bushing. Delivers approximately 1 gallon per 18 revolutions of handle. Great for commercial, automotive, farm and industrial applications.

**SALE \$69**



**1" Drive Ratchet Head**

**200 - 1000 Foot Pounds**

**Model 8447**

Size 200 to 1000 foot pounds weight 3.80. Drive size 1-1/2 inch torque range English foot pound 200 to 1000 foot. Increments (foot pound) Sincements (Nm) 7. Torque range metric 305 1320 head style ratchet. Length-Inches 70-Inch  
List \$2536.09

**SALE \$1495**




**WILSON Model 656HD**

**6 in. Utility Vise**

Jaw Width 6-1/4 In., Max. Opening 6 In., Throat Depth 4-3/8 In., Pipe Capacity 1/8 to 3 In., Base Type Swivel, Rotates 180 Degrees, Jaw Type Replaceable. Serrated Top Jaw, Built-in Pipe Jaw, Formed Steel Channel Beam and Casting With Large Anvil, Body Casting 30,000 psi

**SALE \$239**




**Model 746**

**6 in. Mechanics Vise**

6" Jaw Width  
5-3/4" Jaw Opening  
4-1/8" Throat Depth  
64 lbs Ship Weight  
Jaw width 6"  
Jaw opening 5 3/4" Throat depth 4 1/8" Pipe jaw 1/4" - 3 1/2"

**SALE \$329**




**Model 648HD**

**8 in. Ductile Iron Workshop Vise**

4-1/2" Throat Depth  
Jaw Width 8", Max. Opening 7-1/2", Throat Depth 4-1/2", Pipe Capacity 1/8" to 3", Ductile Iron Jaw Face, Serrated Jaw, Swivel Angle 180 Degrees. Overall Length 20-5/8" Overall Height 11-3/8" Overall Width 11"

**SALE \$329**



**Model 1992**

**1 Inch Drive Impact Wrench with 8 inch Anvil**

1800 ft.-lbs of torque  
1600 impacts per minute  
5000 rpm. Pinless hammer mechanism  
Handle can be installed on either side of the tool  
Anvil equipped with friction ring and socket retainer hole. 2 Year Warranty

**SALE \$395**



**Model 1880-PA**


**Aluminum "Heavy Duty" 1" Pistol Grip Impact Wrench**

Anvil Size: 1"  
Loosening Torque: 1,850 ft.-lbs  
Working Torque: 200-1580 ft.-lbs  
Blows Per Minute: 900  
Warranty: 1 Year

**SALE \$495**



**Model 8322 Air Operated Diaphragm Pump**



Alemite Diaphragm Pumps are designed for both high volume transfer and dispensing a variety of low viscosity fluids including new oil, used oil, windshield washer fluid, antifreeze, and other materials.

Air Inlet: 1/4"  
Body: Aluminum  
Diaphragm: Buna  
Pressure: 100 PSI  
Inlet/Outlet: 1/2"

**SALE \$495**



**Model 6917**

**Air-Operated Portable Grease Pump Package**

High volume and pressure wipes 120 lb. drum sides clean and keeps the drum primed.  
inc. high pressure 50:1 pneumatic pump, high pressure grease control valve, universal swivel and coupler and 7' hose; drum cover, flexible follower plate and band dolly with wheels.

List 1167.00 **SALE \$795**



**Model 3601**

**Pressurized Used Oil Receiver**

**SALE \$219**

For draining, transferring and evacuating motor oils, transmission and power steering fluids quickly. Excellent mobility, easy bowl positioning and simple-to-use pressurized evacuation.

Tank Capacity 72.0 Qts./68.1 Lt  
Drain Bowl Capacity 11 Qts./10.4 Lt




**Model 83753**

**50' x 3/8" Air Reel**

All Steel construction with 3/8" x 50' rubber hose

List 214.00 **SALE \$169**



**Model 83754**

**50' x 1/2" Air Reel**

Steel with 50' x 1/2" rubber hose and ball stop. List \$240.00

**SALE \$197**

Slotted mounting base, easy installation. Spring powered automatic recoil. 8 position ratchet system, easy positioning of hose. 5 position adjustable outlet arm



**Model P59L**

**2-Speed Single Acting Manual Pump**

More usable oil volume- use with larger or longer stroke cylinders. True unloading valve set for 850 PSI (59 Bar) provides more efficiency and lower handle force  
Link design reduces handle effort by 40%  
Power Team hand pumps, with the angled fill port, have a built in "relief valve" protection system. This system is designed to protect over-pressurization of the reservoir from sudden back pressure.  
This system also works as a seal to prevent oil leaks.

**SALE \$467**



**Model 261**

**3/4" Super Duty Air Impact Wrench**

Jumbo hammer mechanism. Up to 1,000ft.-lbs. of torque. Trouble-free, longer performance aided by Pressure-Feed Lube System. Compact and only 7 5/8" long. Handle exhaust.

**SALE \$495**

